



# Elastomer Selection Guide



## Find the Right Elastomer for Your Application

Selecting seal materials can be an intimidating task. There are many types of elastomers and each is available in many different compounds. There are nine popular elastomers used in seals. This guide surveys popular elastomers intended for service at pressures up to 1,500 psi.

If you believe your application may require a special compound not listed, please contact a Tactical Sealing Technologies (TST) customer service representative.

### Elastomer Selection Criteria

#### 1. Temperature Capabilities

Elastomer performance becomes less predictable when a seal operates near the limits of its service temperature range. Consider the effects of temperature extremes when selecting an elastomeric material for your seals.

##### **At low temperatures:**


- Elastomers become harder and less flexible until, at the brittle point or glass transition, the seal may crack.
- Elastomers lose their rubber-like properties as the temperature drops. The TR-10 (temperature

of 10% retraction) reflects the ability of an elastomer to retract, that is, behave like rubber, at low temperatures.

- Fluid may penetrate the seal and act as a plasticizer, effectively lowering the brittle point below the value observed in dry air. In such cases, the seal may operate effectively below its rated service temperature. This must be confirmed on a case-by-case basis.

Fig. 1:

#### Service Temperatures of Popular Elastomers

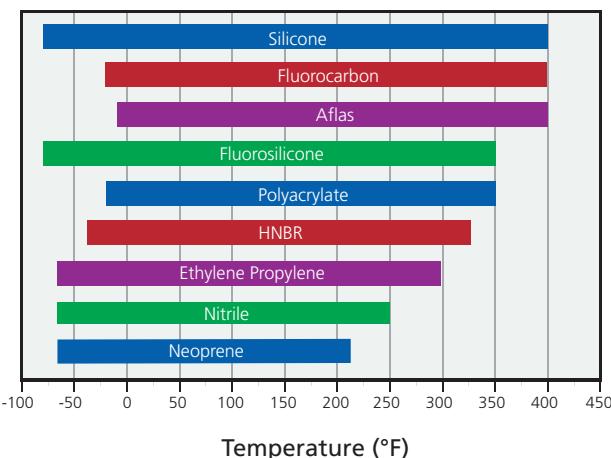

*Compounding affects performance at both high and low temperatures. Not all compounds of a given elastomer have the same temperature range. The temperature limits in the chart span the range of the compounds of each elastomer.*

Fig.2:

**Fluid Compatibility by Elastomer**

Common Fluids	Nitrile	Fluorocarbon	EPDM	Silicone	Neoprene	Polyacrylate	Fluorosilicone	HNBR	Atlas®	Examples
ASTM D1418 Designation	NBR	FKM	EPDM	VMR	CR	ACM	FVMR	HNBR	FEPM	
Acids, dilute	●	●	●	●	●	●	●	●	●	Hydrochloric acid
Alcohols	●	●	●	●	●	●	●	●	●	Methanol, ethanol
Alkalis, dilute	●	●	●	●	●	●	●	●	●	Sodium hydroxide
Brake fluid, non-petroleum	●	●	●	●	●	●	●	●	●	Wagner 21B®, Dextron®
Fuel oil	●	●	●	●	●	●	●	●	●	Diesel oils 1-6
Hydraulic oil, phosphate-ester	●	●	●	●	●	●	●	●	●	Skydrol 500®, Hyjet®
Hydrocarbons, aliphatic	●	●	●	●	●	●	●	●	●	Gasoline, kerosene
Hydrocarbons, aromatic	●	●	●	●	●	●	●	●	●	Benzene, toluene
Ketones	●	●	●	●	●	●	●	●	●	Acetone, MEK
Mineral oil	●	●	●	●	●	●	●	●	●	—
Solvents, chlorinated	●	●	●	●	●	●	●	●	●	Trichloroethylene
Steam, to 300°F	●	●	●	●	●	●	●	●	●	—
Water	●	●	●	●	●	●	●	●	●	—

Legend:

- Recommended
- Moderate-to-severe effect
- Minor-to-moderate effect (useful in some static applications only)
- Not recommended

- Changes in elastomers due to low temperature are physical, not chemical, and are generally reversible. However, if the geometry of the gland changes while the seal is cold, the seal may be too stiff to adapt to the new shape and may fail. Movement may also damage the seal while it is cold and inflexible.

**At high temperatures:**

- As temperatures approach the upper service limit, elastomers often undergo irreversible chemical changes. The polymer backbone may break or adjacent polymer molecules may cross-link, causing seals to become more rigid, reducing their resistance to compression set.
- The rate of many chemical reactions doubles with each increase of 10°C (18°F). The relationship between reaction rate and temperature of these first-order reactions can be used as a rough guide


in predicting the service life of a material. Figure 1 assumes a service life of 1,000 hours at the upper rated temperature. An increase in operating temperature of 18°F may cut seal life in half. The added cost of a seal with a wider service range may be an excellent investment.

**2. Fluid Compatibility**

Figure 2 represents the fluid compatibility of the principal elastomers from left to right. Very high swell, rapid deterioration or complete breakdown of the seal can occur if the elastomer is not compatible with the fluid. Factors such as chemical concentration, system pressure, operating temperature, and seal design must be considered when specifying a seal. TST recommends that you evaluate the selected seal in a functional test before using it in production.

Because so many applications involve hydrocarbons, a selection method based on the heat and oil resistance of the elastomers will encompass most users. In the ASTM D2000 system, elastomers are ranked by heat resistance (Type) and by oil resistance (Class). Employing the ASTM D2000 Type and Class system, Figure 3 displays the resistance of various elastomers to heat and to IRM 903, a common reference oil. However, compounds of a given elastomer can have different rankings for both Type and Class. The selection diagram on the last page also uses heat resistance and hydrocarbon compatibility as principal elastomer selection criteria.

Fig.3:

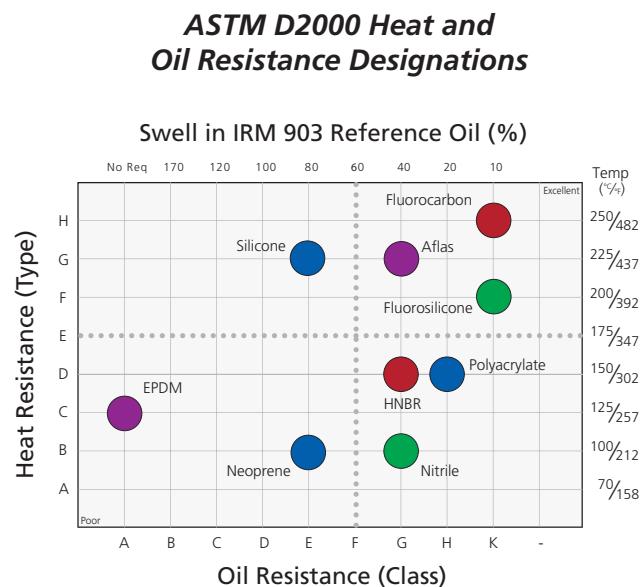

Elastomers fall into natural groups according to their heat and oil resistance. Those above the dotted line are recommended for elevated temperatures. Those to the right of the dotted line are preferred for use with hydrocarbons.


### 3. Abrasion and Tear Resistance

Abrasion-resistant seals are able to resist scraping or buffing. Abrasion resistance is generally a selection criteria for dynamic seals. Tear-resistant

elastomers have superior ability to resist nicking, cutting, and tearing. Good tear resistance may be important in elastomer selection when the seal is to be installed by automated assembly equipment. Elastomers such as hydrogenated nitrile (HNBR) and Aflas are inherently abrasion resistant. Carboxylated nitrile (XNBR) offers significantly better abrasion resistance than standard nitrile. The abrasion and tear resistance of many elastomers can be enhanced by compounding with internal lubricants such as Teflon® or molybdenum disulfide.

Fig.4:

### Abrasion and Tear Resistance of Medium-Hardness Elastomers

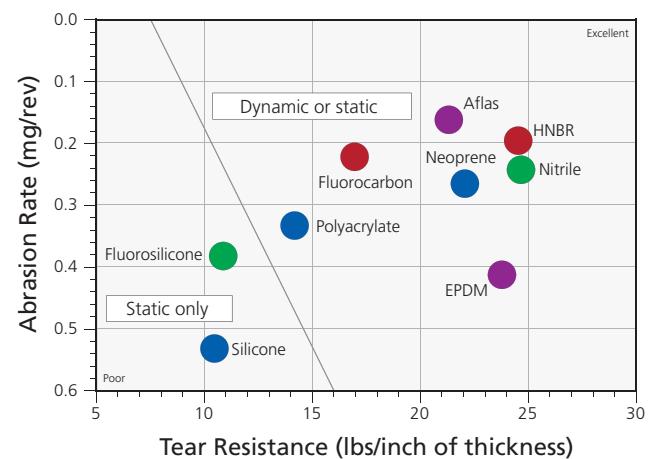

Silicone and fluorosilicone elastomers are used for static applications only. The elastomers lying to the right of the oblique line are suitable for either dynamic or static sealing. Abrasion and tear resistance vary with compound hardness.

### 4. Differential Pressure Resistance

Pressure applied evenly to both sides of a seal normally has no effect on sealing performance. When a pressure difference is anticipated, elastomer selection must also consider differential pressure resistance. High differential pressures will


cause improperly specified seals to extrude, resulting in seal damage and eventual failure.

## 5. Price

Assuming that several elastomers meet all other requirements for a given application, Figure 5 should aid in making an economical selection. The prices of seals of the same elastomer may vary widely due to differences in compounding and processing costs.

Fig. 5:

### Relative Prices of Popular Elastomers

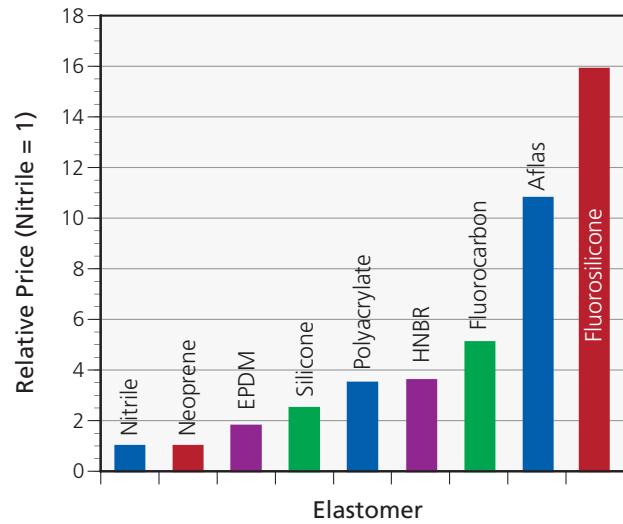

This chart shows the prices of TST seals made of the most popular compound of each elastomer and is intended to provide a rough estimate of relative price.

## Nitrile

Nitrile, also known as Buna N, is the standard to which all the other elastomers are compared. Because they are versatile and inexpensive, nitriles are the most popular industrial seal material. Nitrile compounds provide excellent service with gasoline, crude oil, power steering fluid, hexane, toluene, water, water-based hydraulic fluids, and dilute bases such as sodium hydroxide. Nitriles are not suitable for exposure to ozone, sunlight, and weathering. Individual nitrile compounds have service temperatures within the range from -65 to +250°F, including certain compounds formulated for lower temperatures.

## Fluorocarbon

Fluorocarbons withstand a very broad spectrum of chemicals over a temperature range second only to that of silicone compounds. In spite of their higher cost, fluorocarbons have replaced nitriles in many applications because of their superior resistance to compression set, high-temperature, and a wide range of chemicals. Fluorocarbon compounds are commonly rated for continuous service temperatures from -20 to +400°F, with intermittent exposures as high as 500°F.

## Ethylene-Propylene

Ethylene-Propylene (EPDM) compounds provide superior resistance to water and steam, alcohols, glycol engine coolants and similar polar fluids. EPDMs are frequently specified for Skydrol® and other phosphate-ester hydraulic fluids. They are not recommended for petroleum-based fluids and fuels. Individual EPDM compounds have service temperatures within the range from -65 to +300°F, including certain compounds formulated for higher temperatures.

## Popular Elastomers

The elastomers shown in the selection diagram (Figure 6) are the most popular used for the majority of sealing applications. Variations in mechanical properties and seal performance exist among the compounds of a given elastomer, so price and suitability can vary accordingly.

## **Silicone**

Silicone compounds offer excellent resistance to ozone, UV radiation, fungal and biological attack, and extreme temperatures. Silicones offer the widest service temperature of any elastomer. Special silicone compounds remain flexible at temperatures as low as -175°F and can survive extreme heat to +600°F. Silicone seals are widely used in cryogenics and refrigeration, as electrical insulators, for transformer oils, and for dry heat exposure. They are not recommended for petroleum, ketones, or chlorinated solvents. They have high gas permeation rates and should be restricted to static service due to poor abrasion resistance. Silicone compounds have service temperatures from -80 to +400°F.

## **Neoprene™**

Neoprene™ is the Dupont trademark for chloroprene. Neoprene combines good resistance to weathering and petroleum-based lubricants, a wide temperature range, and exceptional economy. Neoprenes have good abrasion and tear resistance and are suitable for use in heating, ventilating and air conditioning (HVAC) systems, refrigeration units, and numerous dynamic applications. Individual neoprene compounds have service temperatures that range from -65 to +212°F, including certain compounds formulated for lower temperatures.

## **Polyacrylate**

Polyacrylate, also known as polyacrylic rubber, combines excellent resistance to hydrocarbon fuels with near imperviousness to ozone, UV light, and other forms of weathering. Polyacrylates have an upper service temperature similar to fluorosilicones at a much lower cost. Applications include automatic transmission seals and power

steering assembly seals used with Type A fluid.

Polyacrylate compounds have service temperatures from -20 to +350°F.

## **Fluorosilicone**

Fluorosilicones share the outstanding ozone, sunlight, and weathering resistance of the silicones. They find their widest use in aggressive military, aerospace, and automotive environments involving exposure to fuels over wide temperature ranges. They are not recommended for dynamic sealing due to poor abrasion resistance. Fluorosilicone compounds have service temperatures from -80 to +350°F.

## **Hydrogenated Nitrile**


Hydrogenated Nitrile (HNBR), significantly outperforms conventional nitrile in resisting heat and sour crude oil. They are recommended when upgrading from nitriles or as an economical alternative to more expensive fluorocarbon elastomers. HNBR compounds have service temperatures from -40 to +325°F.

## **Aflas®**

Aflas® is a trade name for tetrafluoroethylene propylene copolymer. Aflas® compounds have almost universal resistance to both acids and bases, steam, acid gases, crude oil and many types of corrosion inhibitors. Serviceability extends to 400°F for long-term exposure. Aflas® seals resist the extremes of heat and pressure present in aggressive downhole oil well environments. Aflas® seals have very low rates of gas permeation and are highly resistant to explosive decompression, making them excellent choices for downhole packing elements. Aflas® compounds have service temperatures from -10 to +400°F.

Fig. 6

## Elastomer Selection Diagram

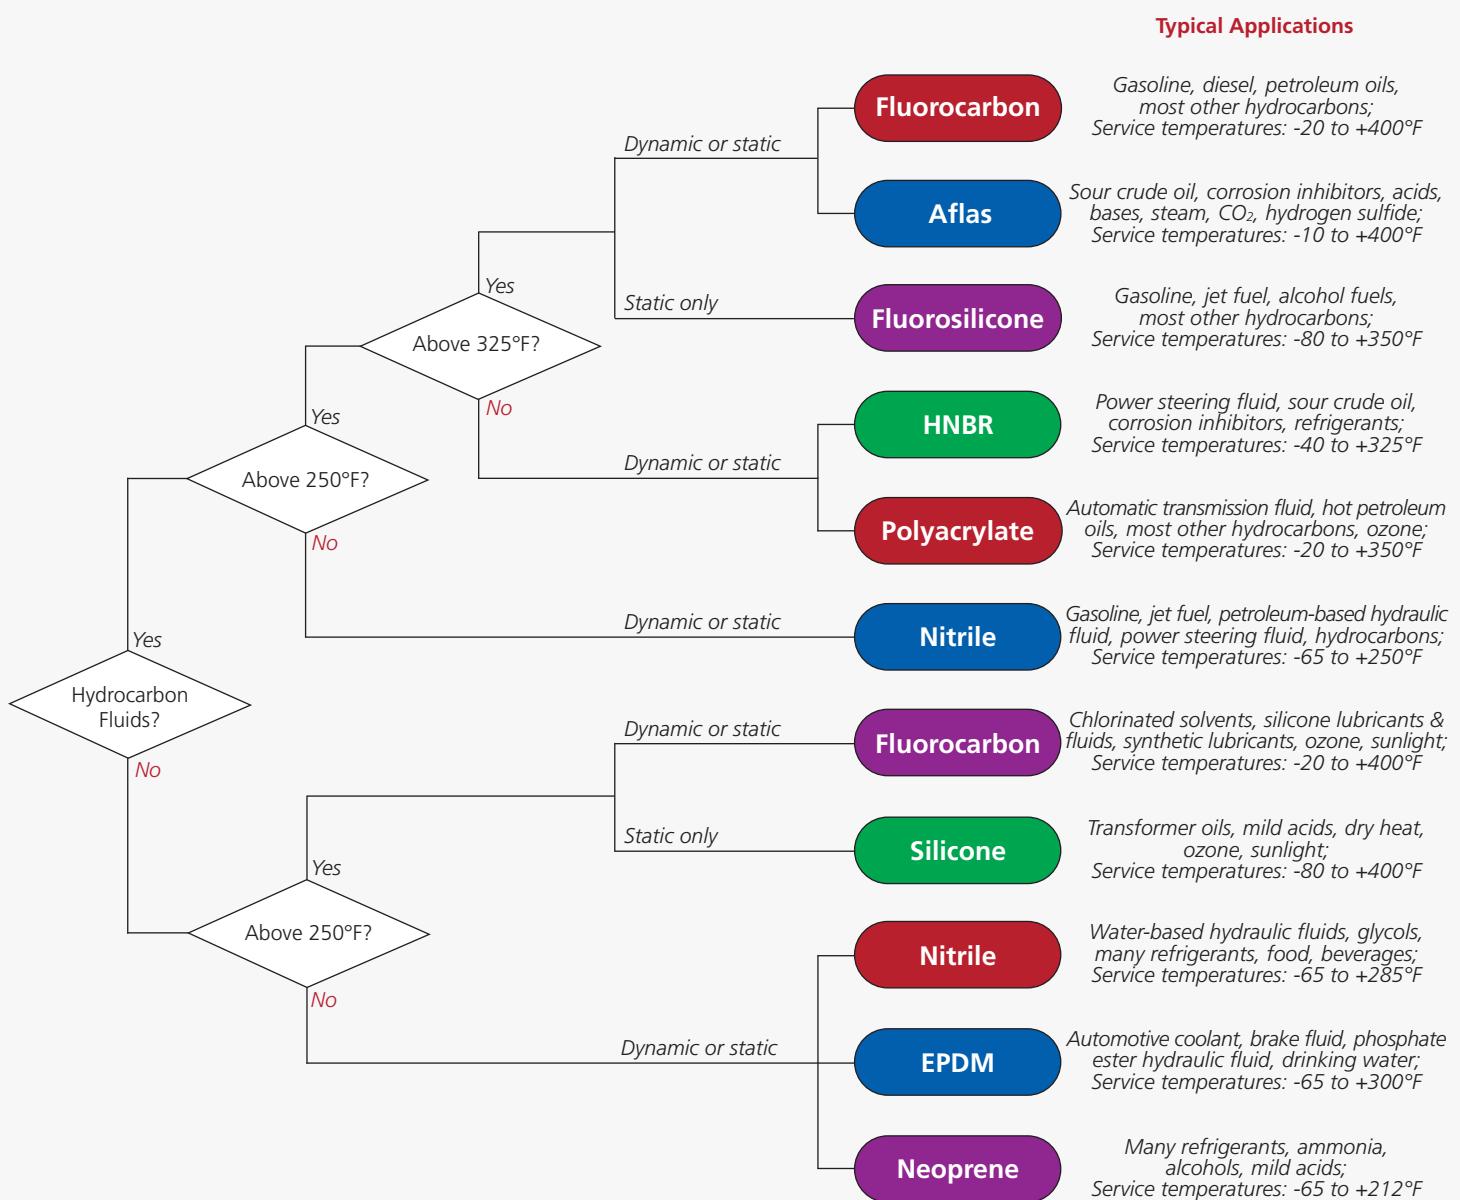

The six elastomers with superior oil resistance are found in the top half of the diagram. Elastomers used mainly in non-hydrocarbon applications are found in the bottom half of the diagram. Fluorocarbon and nitrile are repeated because they are also widely used with nonhydrocarbons.

This brochure is intended as a guideline and reference. Appropriate testing and validation by users having technical expertise is necessary for proper use of TST products.



Tactical Sealing Technologies, 10492 Commerce Row, Montgomery, Texas 77356

936-582-2560 Fax 936-582-2564 [www.tacticalsealing.com](http://www.tacticalsealing.com)